

**Cunext**

**G R O U P**





## ABOUT US

CUNEXT GROUP is specialized in the transformation of copper and aluminium of the highest quality. We focus on continuous innovation and development of products that bring added value to the market.

CUNEXT GROUP is present in all sectors related to the transmission of energy, data or signals, electrical engines, the automotive and railway industry, windfarms, industrial motors, white goods, telecommunication, construction, etc.

With facilities in the provinces of Córdoba and Vitoria (Spain) and Brescia (Italy), we are a leading supplier of rod, wires and stranded and extruded products.



---

## COPPER

COPPER WIRE ROD .....	8
• ETP-1, OF-1, ETP and alloys .....	9
• Railway Applications .....	10
PRODUCTS FOR ALLOYS & ELECTROPLATING .....	11
• Copper Anodes .....	11
• Copper Cathode Sheets .....	11
SEMI-FINISHED PRODUCTS.....	12
Drawing and Stranding	
• Single Wires.....	13
• Copper Wires for Braiding.....	13
• Multiwires .....	14
• Stranded Wires.....	15
• High Frequency Litz Cables .....	16
SEMI-FINISHED PRODUCTS.....	17
Flat wires and isolated conductors	
• Flat Wires and Pancakes/Coils.....	18
• Tinned Flat Wires .....	19
• Busbars .....	20
• Isolated Flat Wires and Cables .....	21
• Fire Resistant Wires and Cables.....	22
• High Frequency Flat Litz Cables.....	23

---

## ALUMINIUM

ALUMINIUM WIRE ROD .....	26
• Aluminium Wire Rod .....	27
• Aluminium Anodes.....	27
SEMI-FINISHED PRODUCTS.....	28
Drawing and Stranding	
Electrical Applications	
• Wires .....	29
• Multiwires .....	29
• Stranded Wires Class II.....	30
• Stranded Wires Class V .....	31
• Overhead conductors .....	32
• Litz Cables.....	34
SEMI-FINISHED PRODUCTS.....	35
Drawing and Stranding	
Electrical Applications	
• Aluminium Conductors for Automotive Industry.....	36
SEMI-FINISHED PRODUCTS.....	38
Solid Wires and Isolated Conductors	
• Flat, Round and Sectorial Wires .....	39
• Isolated Flat Wires and Cables.....	39


---

## PARTS AND SUB-ASSEMBLIES

- Parts and Sub-Assemblies..... 42

## RECYCLABILITY AND CIRCULARITY

- Tolling Service - Recycled Units .....
-

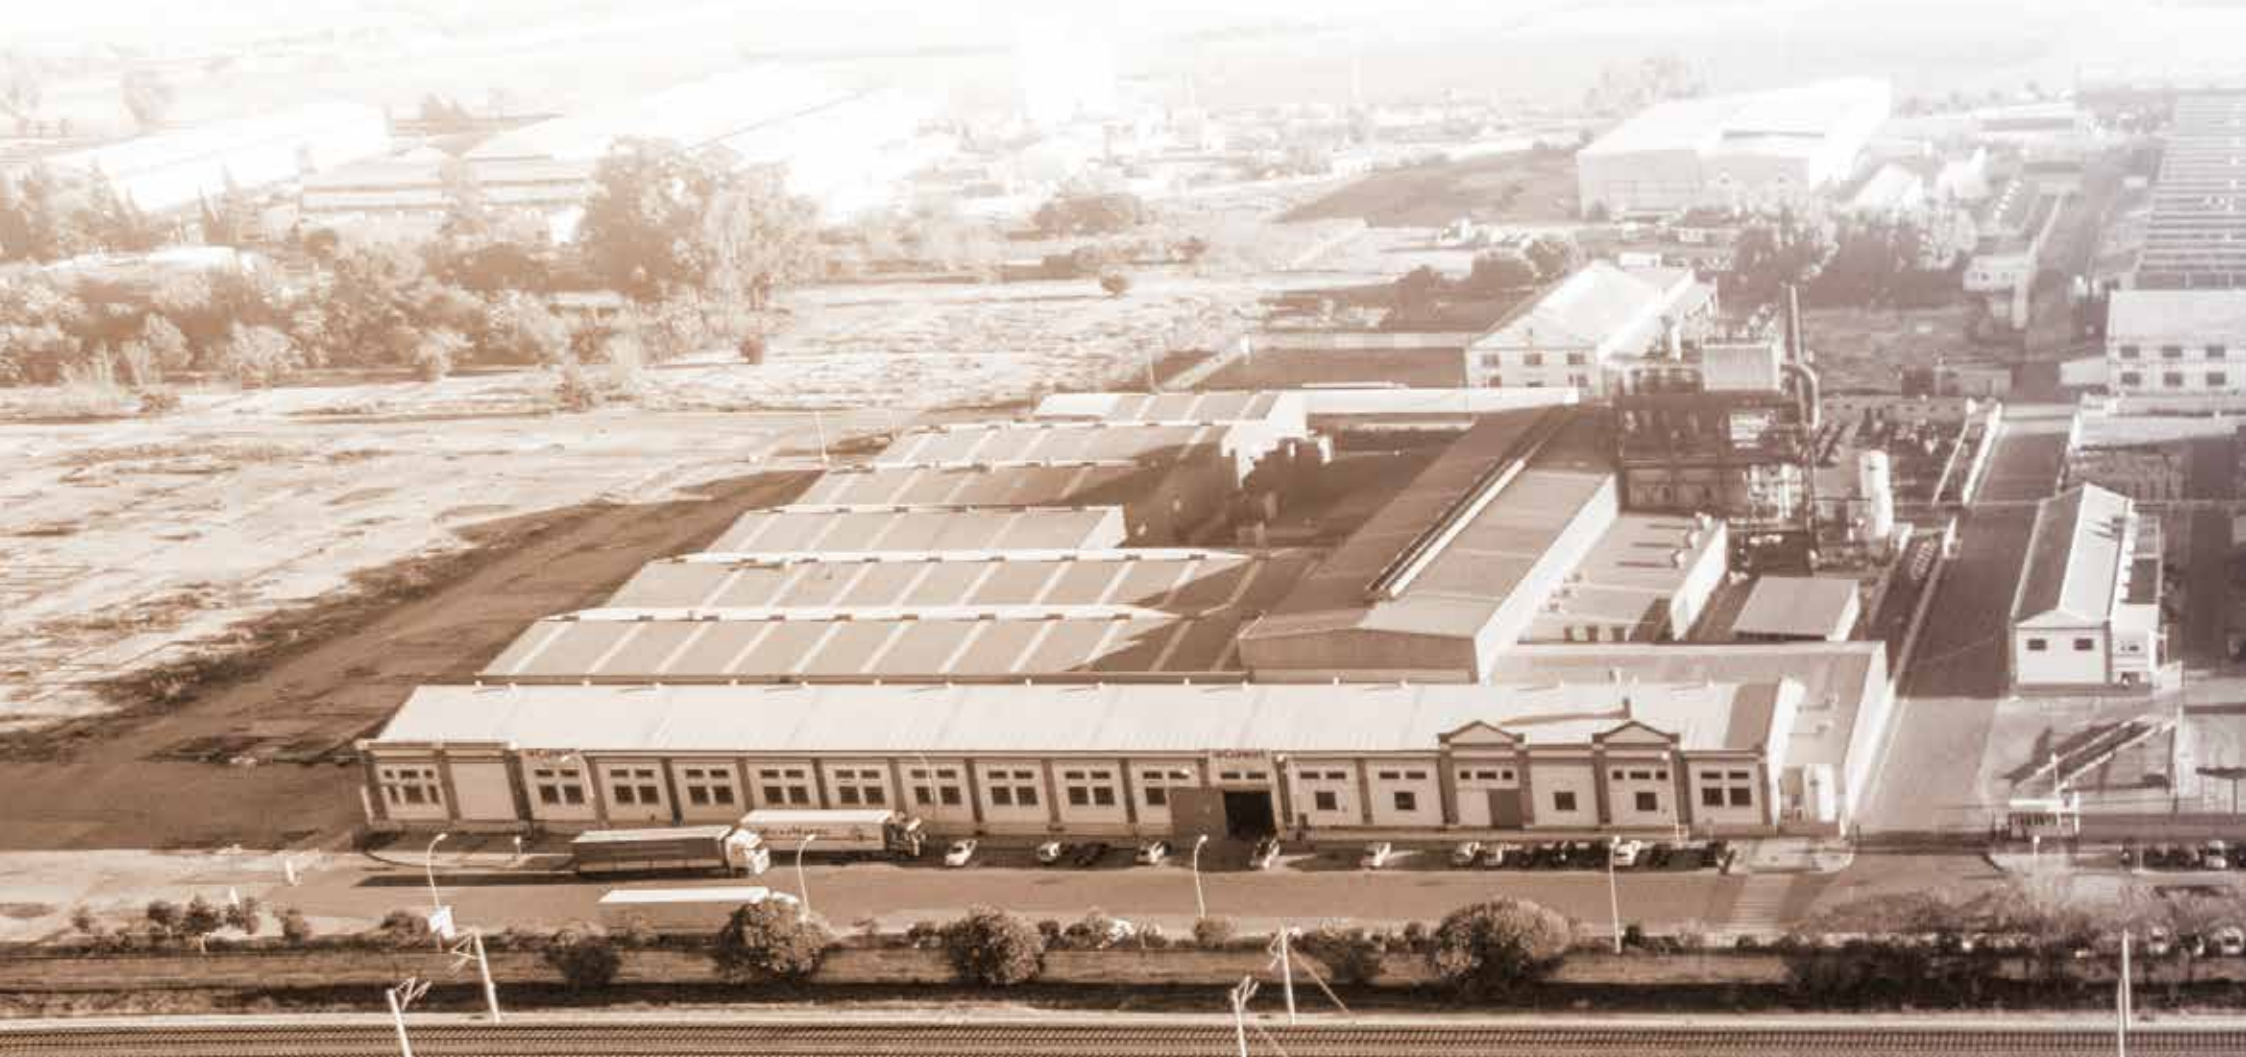

2005

 **Cunext Copper Industries**  
CUNEXT GROUP

2009

 **Estacor**  
CUNEXT GROUP

2014

Nuevo accionariado

2015

 **ECN**  
CUNEXT GROUP

 **Transformados Cunext Copper**  
CUNEXT GROUP



2016



2018



2020



CUNEXT USA inc.

2021



\* Investee Companies





The image features a minimalist, abstract design on a white background. On the right side, there are several overlapping, stepped rectangular shapes. The top and bottom shapes are filled with a fine, diagonal hatched pattern. The middle shape is a solid, light brown color. The word "COPPER" is centered within this middle shape in a dark brown, uppercase, sans-serif font. The overall aesthetic is clean and modern, with a focus on geometric forms and color contrast.

COPPER



COPPER WIRE ROD

## ETP-1, OF-1, ETP AND ALLOYS



	ETP-1	OF-1	ETP
Nominal diameters	8 mm	8-12,5-16, 20, 25 mm	8 mm
Dimensional tolerance	±0,4		
Oxygen	180-250 ppm	< 3 ppm	200-400 ppm
Conductivity	>101 % IACS		>100 % IACS
% Elongation to (A200)	> 40 %	> 35 %	> 30 %
Max. Weight	5.200 kg		
Standard	EN1977, ASTM B49		
PACKAGING			
	Ø ext	Ø int	Height
Coil	1.785 mm	1.150 mm	900 mm
Coil + Pallet	1.800 mm	1.800 mm	1.050 mm
Strapped onto wooden pallet and protected through plastic film			

Also available different grades of oxygen free Copper alloys (Tin, Silver, Phosphorous, Magnesium) upon customer request.

## RAILWAY APPLICATIONS



### Contact Wire

Contact wire has the function to transmit electrical energy from the catenary to the train pantograph. Cunext produces contact wires in different dimensions, slots and alloys.

Sections  
80, 100, 107, 120 y 150

Groove  
Slot type A or Slot type B

Profile  
Circular or flat

Alloy  
Cu, CuAg, CuSn y CuMg



### Rigid Cables

Cunext produces the different railway cables installed in catenary, messenger cable and feeder cable. They are produced in copper, bronze and aluminium.

Alloy: Cu and CuMg.



### Flexible Cables

Flexible cables are used in connections and key positions for catenary energy transmission.



### Dropper

Droppers are cables used for connecting catenary cables with contact wires. Copper and bronze droppers are produced according to railroad features.

PRODUCTS FOR  
ALLOYS AND  
ELECTROPLATING



Copper Anodes

Ø 8, 12,5 and 16 mm

20 - 25 mm length

ETP, ETP-1, OF and DXP copper

Big-bag 1.000 kg strapped onto wooden pallet

Copper Cathode  
Sheets

500x500 mm; 1.000x200 mm;  
1.000x333 mm; 1.000x500 mm

1 - 10 mm thickness

Strapped onto wooden pallet



A large spool of copper wire is the central focus, showing the intricate texture of the wire. The background is a blurred industrial environment with various machinery and structures. A white banner with a brown border is overlaid on the right side of the image, containing the text.

# SEMI-FINISHED PRODUCTS


DRAWING AND STRANDING

## SINGLE WIRES

Norms ASTM B1, ASTM B3, ASTM B33, ASTM B355, EN 13602

Diameters and standard packaging				
mm	<0,30	0,30 a 0,75	0,75 a 1,30	> 1,30
DIN 250				
DIN 400				
DIN 500				
DIN 630				
DIN 800				
DIN 1200				
Cardboard box				

Bare or tinned copper

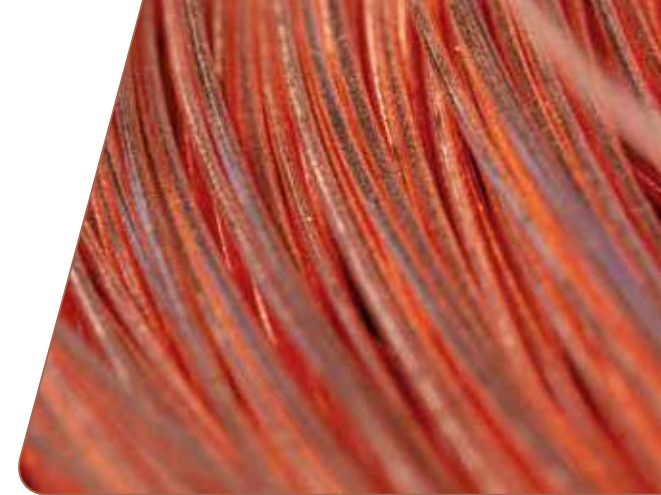

## COPPER WIRES FOR BRAIDING

Number of wires: from 4 up to 16  
 Ø from 0,10 up to 0,20 mm  
 Bare or tinned copper



	Width (mm)	Height (mm)	Weight (kg)
SPI 80/10/100S Plastic Spool	80	80	2
SPI 98 Plastic Spool	98	100	3,5

Packaging: 2.250 kg/cardboard box, strapped onto wooden pallets



	Width (mm)	Height (mm)	Weight (kg)
DIN 250	200	250	25
DIN 400	300	400	150
DIN 500	315	500	225
DIN 630	440	630	500
DIN 760	480	760	700
DIN 800	540	800	1.000



	Width (mm)	Height (mm)	Weight (kg)
DIN 630	440	630	500
DIN 1200	730	1.200	2.500

	Height (mm)	External radius (mm)	Internal radius (mm)	Weight (kg)
Cardboard box	1.300	1.000	630	2.000

# MULTIWIRES



Compositions									
Diameter (mm)	Number of wires								
	6	8	10	12	16	20	24	32	36
0,70									
0,50									
0,40									
0,30									
0,25									
0,20									
0,10									

- Bare or tinned  
Metallic drums



- DIN 630, DIN 800 / Static winding / Annealed or tinned
- DIN 630, DIN 800 / Static or dynamic winding / Annealed or tinned
- DIN 630, DIN 800 / Static or dynamic winding/ Annealed or tinned;  
DIN 250 or DIN 400 / Dynamic winding / Annealed or tinned
- DIN 630, DIN 800 / Static or dynamic winding / Annealed or tinned;  
DIN 1000 / Static winding / Annealed
- DIN 630, DIN 800 / Static or dynamic winding / Annealed or tinned;  
DIN 1000 / Static winding / Annealed;  
DIN 250, DIN 400 / Dynamic winding Annealed or tinned
- DIN 630, DIN 800 / Dynamic winding / Annealed or tinned;  
DIN 630, DIN 800, DIN 1000 / Static winding / Annealed
- DIN 630 / Dynamic winding / Annealed or tinned;  
DIN 800 Static or dynamic winding / Annealed or tinned;  
DIN 1000 Static winding / Annealed
- DIN 630, DIN 800 / Static or dynamic winding / Annealed;  
DIN 1000 / Static winding / Annealed
- DIN 630, DIN 800 / Static or dynamic winding / Annealed
- DIN 250, DIN 400, DIN 500, DIN 630 / Dynamic winding / Annealed or tinned



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 250</b>	200	250	25
<b>DIN 400</b>	300	400	150
<b>DIN 500</b>	315	500	225
<b>DIN 630</b>	440	630	500
<b>DIN 800</b>	540	800	1.000
<b>DIN 1000</b>	675	1.000	2.000



# STRANDED WIRES

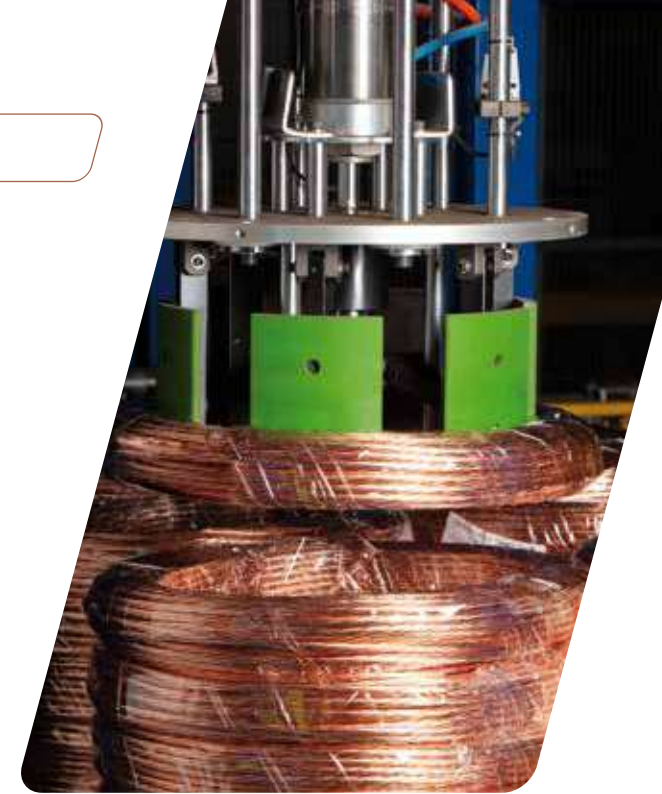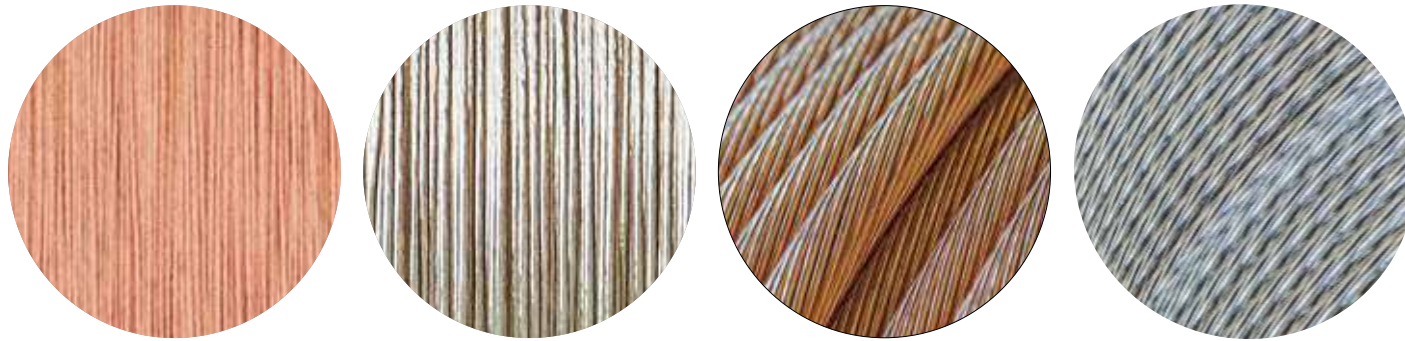

	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 630</b>	440	630	350/500
<b>DIN 800</b>	540	800	800
<b>DIN 1000</b>	675	1.000	1.000
<b>DIN 1250</b>	950	1.250	1.200
<b>DIN 1600</b>	1.000	1.600	1.250



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 630_C</b>	442	630	350/500
<b>DIN 1200</b>	730	1.200	1.100

mm <sup>2</sup>	> 0,50	> 35	> 95	> 1200
Class II				
Class V and VI				

mm <sup>2</sup>	0,35	0,5	0,75	1	1,5	4	6	10	25	50	1200	Weight (kg)
DIN 630												350/500
DIN 800												800
DIN 1000												1500
DIN 1250												2000
DIN 1600												6000

\*\* Wooden or metallic coils. Bigger spools for higher sections available on request

**Standards** ASTM B174, ASTM B8, ASTM B286, EN 60228, EN 20701 5, C34-110-3, BS7884

Up to 800 mm<sup>2</sup> and DIN 2440

● Bare or tinned

## HIGH FREQUENCY LITZ CABLES

Number of single wires: from 10 up to 120  
Ø from 0,18 up to 0,50 mm  
Pitch 20 - 60 mm

### Constructions

- Single step construction
- Concentric design
- Multistep concentric design

Also available customized taping



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 355</b>	440	355	50
<b>DIN 500</b>	250	500	80





# SEMI-FINISHED PRODUCTS

FLAT WIRES AND ISOLATED CONDUCTORS

# FLAT WIRES AND ROUNDS AND PANCAKES/COILS



**CHEMICAL COMPOSITION:** Cu ETP1 or Cu OF1 according to standard EN 1977.  
**NORMATIVE REFERENCES:** EN 13601 / EN 60317 / EN 60228.

## FLAT WIRES

Hardness	Tensile strength (N/mm <sup>2</sup> )	Elongation 100 mm (%)	Resistivity (Ω·mm <sup>2</sup> /m)
R200 (soft)	200 (min)	35 (min)	0,01724 (max)
R250 (half-hard)	250 - 270 (1)	24 (min)	0,01724 (max)

(1) Maximum value depending on the dimension of the product.



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 630</b>	440	630	500
<b>DIN 800</b>	540	800	1.000
<b>DIN 1000</b>	630	1.000	2.000



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 630</b>	230	630	200
<b>DIN 710</b>	250	710	250
<b>DIN 750</b>	180/220	750	300
<b>DIN 1000</b>	400	1.000	800



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 500</b>	186	500	60
<b>DIN 630</b>	314	630	200

		Nominal Width (mm)															
		4	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
Nominal Thickness (mm)	1,2																
	2																
	3																
	4																
	5																
	6																
	7																
	8																
	10																
	12																

- Shapes in lengths (up to 6 meters in length) or spools (up to 6 Tm, 1800 mm flange diameter)
- Shapes in spools (up to 6 Tm, 1800 mm flange diameter)
- Shapes in pancakes

## TINNED FLAT AND ROUNDS WIRES

According to standard EN 13601

Parameter	Required value	Tolerance	Actual value
Width (mm)	30,00	0,15	30,00 ± 0,15
Thickness (mm)	2,00	0,05	2,00 ± 0,05
Tin coating thickness (µm)	-	-	1,5 - 2,0
Tensile strength (N/mm <sup>2</sup> )	200	(Min)	210 - 250
Elongation (%)	32	(Min)	38 - 50

Length 50 and 100 m

Width and thickness, also customized, also available in 8 mm diameter round



## BUSBARS



**CHEMICAL COMPOSITION:** Cu ETP1 or Cu OF1 according to standard EN 1977.  
**NORMATIVE REFERENCES:** EN 13601 / EN 60317 / EN 60228.

## BUSBARS

Hardness	Tensile strength (N/mm <sup>2</sup> )	Elongation 100 mm (%)	Resistivity (Ω·mm <sup>2</sup> /m)
R200 (soft)	200	35 (min)	0,01724 (max)
R250 (half-hard)	250	12 (min)	0,01724 or 0,01754 (max)*
R300 (hard)	300	8 (min)	0,01754 (max)

\* R<sub>max</sub> = 0,01754 Ω·mm<sup>2</sup>/m from R260  
 Bare or tinned  
 Sharp, rounded and round edges



	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
BOX	4.000	300	160	1.000
	5.000	300	160	
BOARD	4.000	300	300	1.000
	5.000	120	120	

# ISOLATED FLAT WIRES AND CABLES

**CHEMICAL COMPOSITION:** Cu ETP1 or Cu OF1 according to standard EN 1977  
**NORMATIVE REFERENCES:** EN 60317 / EN 60228



Nominal Width (mm)

	4	5	6	7	8	9	10	12	14	16	18	20	22	24	26
1,2															
2															
3															
4															
5															
6															
7															
8															
10															
12															
14															

Nominal Thickness (mm)

Shapes in spools (up to 1 Tm)



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 630</b>	230	630	200
<b>DIN 710</b>	250	710	250
<b>DIN 750</b>	180/220	750	300
<b>DIN 1000</b>	400	1.000	800



	Width (mm)	Height (mm)	Weight (kg)
<b>DIN 500</b>	186	500	60
<b>DIN 630</b>	314	630	200

## FIRE RESISTANT WIRES AND CABLES


From 0,5 mm<sup>2</sup> up 300 mm<sup>2</sup>, Class I, II, V and VI

INSULATION (TAPES): mica/glass cloth (muscovite and phlogopite)



	Width (mm)	Height (mm)
<b>DIN 630</b>	440	630
<b>DIN 800</b>	540	800

Length (m) depends on cable composition

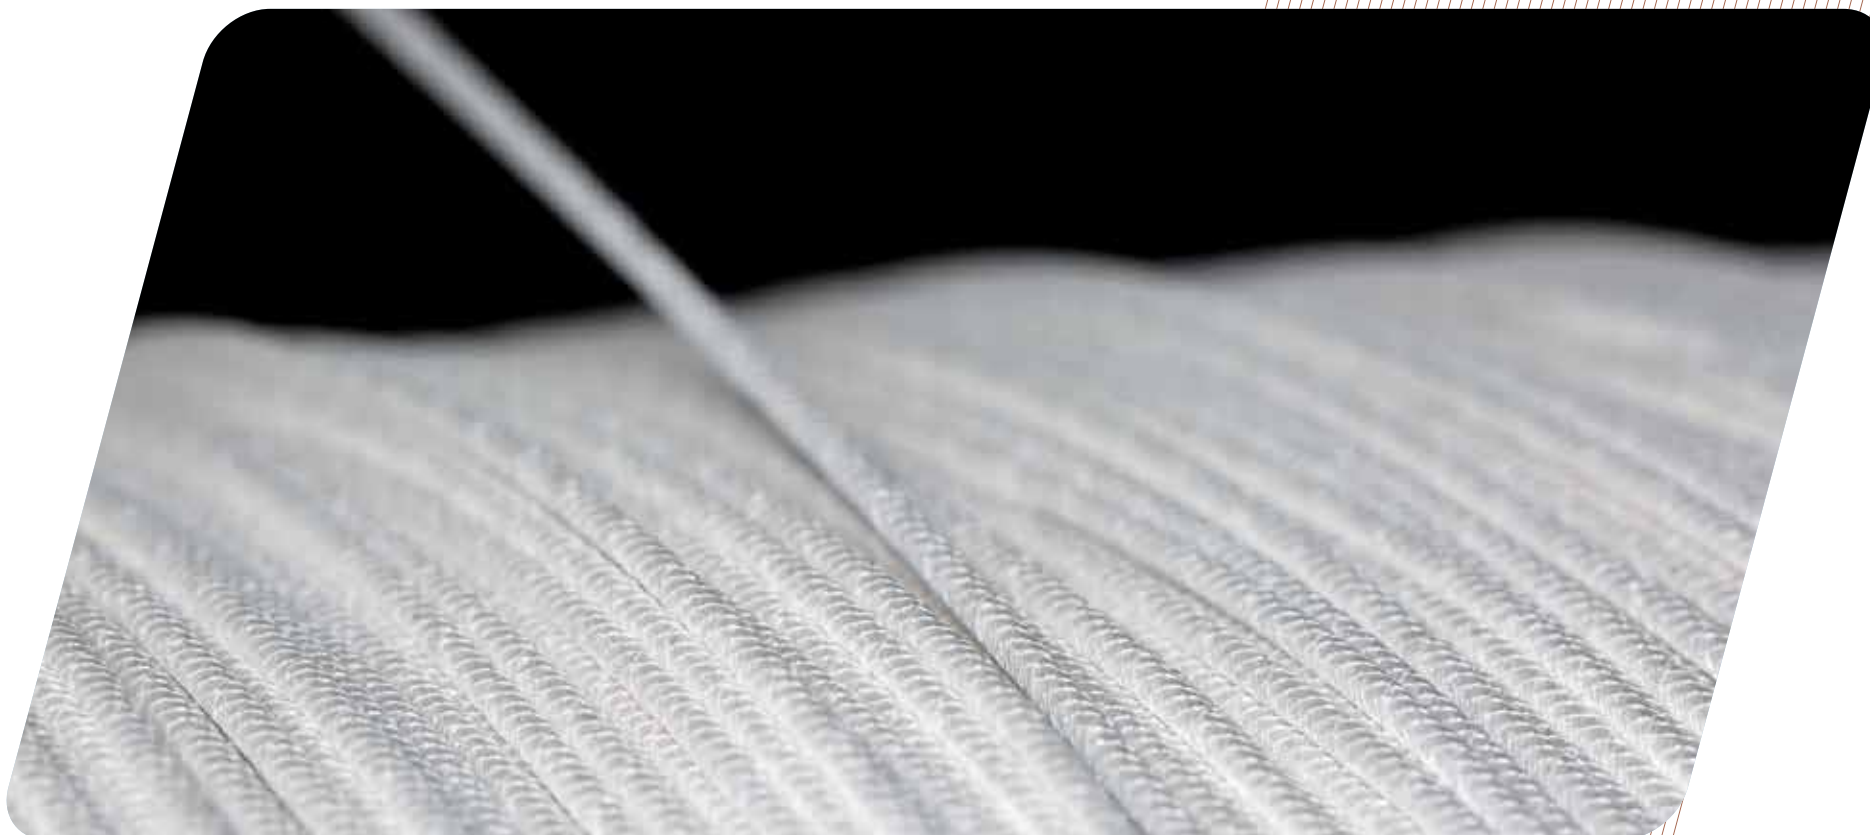



## HIGH FREQUENCY FLAT LITZ CABLES

From 3 mm<sup>2</sup> up 50 mm<sup>2</sup>

Number of single wires: from 10 up to 120  
Ø from 0,18 up to 0,50 mm

Final rectangular dimensions:  
Width: from 3 up to 10 mm  
Thickness: from 1 up to 5 mm

### Tolerances:

- $\leq 3$  mm:  $\pm 0,03$  mm
- 3 – 6 mm:  $\pm 0,06$  mm
- $\geq 6$  mm:  $\pm 0,10$  mm



	Width (mm)	Height (mm)	Weight (kg)
DIN 250	200	250	25
DIN 355	200	355	60
DIN 500	250	500	80





# A L U M I N I U M



A close-up photograph of an aluminium wire rod. The rod is cylindrical and has a woven mesh sleeve wrapped around it. The mesh is made of a light-colored material, possibly fiberglass or plastic, and is secured with a white adhesive or sealant. The rod itself is a bright, metallic silver color. The background is blurred, showing some red and white elements, possibly parts of a machine or a container.

ALUMINIUM WIRE ROD

## ALUMINIUM WIRE ROD

Alloy designation	AW1370 (min 99,7 % Al), AW1350 (min 99,5 % Al), AW1350 (min 99,5 % Al)
Nominal diameter	9,5 mm
Maximum weight	2.500 kg +/- 100 Kg
Standard	EN 573-3, EN 1715-1, EN 1715-2, ASTM B233

### PACKAGING AND DIMENSIONS

	Ø ext (mm)	Ø int (mm)	Height (mm)
Coil	1.450	570	850
Coil + pallet	1.450		1.000

Strapped onto wooden pallet and protected by plastic film



Treatment	Tensile strength		Elongation A100mm (%)	Resistivity Max (µΩ cm)	Conductivity Min (%IACS)
	Min (Mpa)	Max (Mpa)			
H14	115	130	14	2,801	61,5
H13	105	120	16	2,801	61,5
H12	95	110	20	2,801	61,5
H11	80	95	25	2,785	61,9
O	60	80	40	2,725	63,3

EN 1715-2

Treatment	Tensile strength		Resistivity Max (µΩ cm)	Conductivity Min (%IACS)
	Min (Mpa)	Max (Mpa)		
H16	117	152	2,8126	61,3
H14	103	138	2,808	61,4
H12	83	117	2,8035	61,5
O	59	97	2,7899	61,8

ASTM B233



## ALUMINIUM ANODES

Ø 9,5 mm  
 10 - 25 mm length  
 AW1370 (min 99,7 % Al) or AW1350 (min 99,5 % Al)  
 Big-bag 500 kg strapped onto wooden pallet



# SEMI-FINISHED PRODUCTS

DRAWING AND STRANDING  
ELECTRICAL APPLICATIONS

# WIRES

**Norm** EN 1301-1, EN 1301-2, EN 1301-3, ASTM B-230, ASTM B-609

Diameter and standard packaging*	
mm	1,25 - 5,00
DIN 630 wooden drum	
Cardboard box	

\*Possibility of metallic drums



	Width (mm)	Height (mm)	Weight (kg)
DIN 630	630	475	190
Cardboard box	1.000	1.500	750



# MULTIWIRES

**Norm** ISO 6722-2

Composition		
Diameter (mm)	Number of wires	
From 0,2 up to 0,50	8	16

Hard or annealed



	Width (mm)	Height (mm)	Weight (kg)
DIN 630	630	570	150
DIN 800	800	570	260



## STRANDED WIRES CLASS II



### Low and medium voltage

Norm EN 60228, IEC 60228

Sections Class II (mm <sup>2</sup> )			
mm <sup>2</sup>	From 10 up to 50	From 50 up to 185	From 185 up to 630
Class II UNILAY			
Class II CROSSED LAY			

Compacted or not compacted

Section mm <sup>2</sup>	WOODEN		METALLIC					
	Drum	Length (m)	Drum	Length (m)				
10	138/76	40.000						
16		22.000						
25		15.000						
35		10.000						
50		8.000						
70	186/117	18.000						
95		14.500						
120		12.000						
150		8.000						
185		6.900					CF	12.600
240		5.600						10.000
300		4.200						7.600
400		3.300						6.000
500		2.200					AD	3.900
630		2.000						3.500



	Width (mm)	Height (mm)	Weight (kg)
DIN 1320	1.320	560	100
DIN 1800	1.800	1.150	100



# STRANDED WIRES CLASS V

## Flexible aluminium conductors

Norm ISO 6722-2


NOMINAL SECTION	SECTION (mm <sup>2</sup> )		Electric resistance at 22°C	STRUCTURE						Length per coil (km)	
	max	min		A		B		C		DIN 1080	DIN 630
				Number of wires	Max wire Ø (mm)	Number of wires	Max wire Ø (mm)	Number of wires	Max wire Ø (mm)		
0,75	0,754	0,698	41,2	7	0,38	11	0,30	19	0,23		55,00
1	1,01	0,932	30,8	7	0,43	16	0,29	19	0,27		40,00
1,25	1,25	1,16	24,8	19	0,30	16	0,32	12	0,37		32,00
1,5	1,47	1,36	21,2	19	0,32	16	0,35	37	0,23		27,00
2	1,98	1,83	15,7	19	0,37	15	0,42	37	0,27		20,00
2,5	2,45	2,27	12,7	19	0,43			37	0,30		16,00
3	3,03	2,80	10,2	19	0,46	23	0,42	37	0,33		13,00
4	3,95	3,66	7,85	37	0,38	30	0,42	47	0,33		10,00
5	4,73	4,38	6,57	37	0,41	36	0,42	58	0,33		8,00
6	5,93	5,49	5,23	37	0,46	45	0,42	70	0,33	33,00	
8	7,82	7,24	3,97			59	0,42	98	0,33	25,00	
10	10,2	9,47	3,03			50	0,52	126	0,33	19,00	
12	12,3	11,3	2,53			60	0,52	154	0,33	16,00	
16	16,1	14,9	1,93			78	0,52	209	0,33	12,00	
20	19,5	18,1	1,59			95	0,52	247	0,33	10,00	
25	25,1	23,2	1,24			122	0,52	323	0,33	7,00	
30	28,8	26,6	1,08			141	0,52	361	0,33	6,80	
35	35,3	32,7	0,878	121	0,62	172	0,52	456	0,33	5,50	
40	39,4	36,5	0,788	134	0,62	193	0,52	494	0,33	4,90	
50	50,6	46,9	0,613	172	0,62	247	0,52	646	0,33	3,80	
60	59,1	54,7	0,525	201	0,62	289	0,52	741	0,33	3,30	
70	71,9	66,6	0,432	180	0,72	351	0,52	855	0,33	2,70	
85	85	78,7	0,365	213	0,72	420	0,52	1.064	0,33	2,30	
95	95	88	0,327	238	0,72	463	0,52	1.178	0,33	2,00	
120	122	113	0,255	234	0,82	305	0,72			1,60	
160	159	147	0,195	243	0,92	398	0,72			1,20	
400			0,078	1944	0,50						1,030 Km DIN LH1400








DIN630 hasta la sección 12 mm<sup>2</sup>

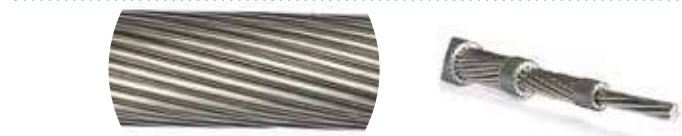DIN1000-1250-1400-1600 desde la sección 16 mm<sup>2</sup> en adelante

# OVERHEAD CONDUCTORS



INTERNATIONAL DESIGNATION	FEATURES	APPLICATIONS
ACSR	Conductors	Steel core aluminium conductors Composed by various aluminium and galvanized steel wires stranded in concentric layers
	Main applications	In medium, high and very high voltage overhead lines
	Norms	EN 50182, IEC 61089, ASTM B232
AAC	Conductors	Aluminium conductors Composed by various aluminium wires stranded in concentric layers
	Main applications	In low voltage overhead lines and substations connections
	Norms	EN 50182, IEC 61089, ASTM B231
AAAC	Conductors	Aluminium alloy conductors Composed by various aluminium alloy wires stranded in concentric layers
	Main applications	In low, medium, high and very high voltage overhead lines
	Norms	EN 50182, IEC 61089, ASTM B399
ACAR	Conductors	Steel core aluminium conductors Composed by various aluminium and galvanized steel wires stranded in concentric layers
	Main applications	In low, medium, and high voltage overhead lines
	Norms	EN 50182, IEC 61089, ASTM B524

	Conductors	Steel core aluminium alloy conductors Composed by various aluminium alloy and galvanized steel wires stranded in concentric layers
	Main applications	In low, medium, and high and very high voltage overhead lines, as cross-over or guard cable
	Norms	EN 50182, IEC 61089, ASTM B711
	Conductors	Aluminium-clad steel core aluminium conductors (ARAWELD)
	Main applications	In medium, and high and very high voltage overhead lines, especially in corrosive environments
	Norms	EN 50182, IEC 61089, ASTM B549
	Conductors	Aluminium-clad steel conductors (ARAWELD) Composed by various aluminium-clad steel wires stranded in concentric layers
	Main applications	Earthing cables in distribution lines, conductors in large cross-over, and electrification lines.
	Norms	EN 50182, IEC 61089, ASTM B416
	Conductors	Aluminium conductors steel supported
	Main applications	Existing lines. Increased transport capacity due to the substitution of the conductors maintaining the mechanical tension and security distances. New lines. The poles may prove more economical due to the reduced deflection of the conductor. In case of high emergency surcharges, or when facing excessive wind vibration. Increased distance between poles.
	Norms	EN 50540, ASTM B856-B857
	Conductors	The OPGW conductor is usually composed of a central non-metallic tubular structure containing optical fibres, situated inside the aluminium tube. The tube is surrounded by one or more layers of steel or aluminium, aluminium alloy and steel alloy wires. The specific type, size and number of these wires are selected to suit each individual application.
	Main applications	These cables can carry both electrical power and optical transmissions, fully utilising the capabilities of new or existing low and medium tension network structures.
	Norms	UNE-EN 61.232, IEC 60.793, IEC 60.794



	Width (mm)	Height (mm)
<b>DIN 1270</b>	1.270	700
<b>DIN 1320</b>	1.320	560
<b>DIN 1600</b>	1.600	820
<b>DIN 1800</b>	1.800	820
	1.800	1.130
	1.800	1.150



	Width (mm)	Height (mm)
<b>DIN 1800</b>	1.800	1.015
<b>DIN 2290</b>	2.290	1.346
<b>DIN 2425</b>	2.425	1.560
<b>DIN 2600</b>	2.600	1.560

Length (m) depends on cable composition

## LITZ CABLES



Number of single wires: from 10 up to 120  
 Ø from 0,25 up to 0,70 mm  
 Pitch 20 - 60 mm


**Constructions:**

- Single step construction
- Concentric design
- Multistep concentric design

Also available laminated and isolated



	Width (mm)	Height (mm)	Weight (kg)
DIN 355	440	355	10
DIN 500	250	500	25



# SEMI-FINISHED PRODUCTS

DRAWING AND STRANDING  
ELECTRICAL APPLICATIONS

## ALUMINIUM CONDUCTORS FOR AUTOMOTIVE INDUSTRY

Norm ISO 6722-2

NOMINAL CROSS-SECTION	CALCULATED CROSS-SECTION		MAXIMUM RESISTANCE AT 20° C AT 20° C	
	max.	min.	Aluminium	Aluminium alloy
mm <sup>2</sup>	mm <sup>2</sup>	mm <sup>2</sup>	Ω / km	Ω / km
0,75	0,754	0,698	41,2	43,6
1	1,01	0,932	30,8	32,7
1,25	1,25	1,16	24,8	26,3
1,5	1,47	1,36	21,2	22,4
2	1,98	1,83	15,7	16,6
2,5	2,45	2,27	12,7	13,4
3	3,03	2,80	10,2	10,9
4	3,95	3,66	7,85	8,32
5	4,73	4,38	6,57	6,96
6	5,93	5,49	5,23	5,55
8	7,82	7,24	3,97	4,20
10	10,2	9,47	3,03	3,21
12	12,3	11,3	2,53	2,68
16	16,1	14,9	1,93	2,05
20	19,5	18,1	1,59	1,69
25	25,1	23,2	1,24	1,31
30	28,8	26,6	1,08	1,14
35	35,3	32,7	0,878	0,931
40	39,4	36,5	0,788	0,835
50	50,6	46,9	0,613	0,650
60	59,1	54,7	0,525	0,556
70	71,9	66,6	0,432	0,457
85	85	78,7	0,365	0,387
95	95	88	0,327	0,346
120	122	113	0,255	0,270
160	159	147	0,195	0,207






CONSTRUCTION						Weight (kg/km)
Structure A		Structure B		Structure C		
Number of wires	Maximum wire diameter (mm)	Number of wires	Maximum wire diameter (mm)	Number of wires	Maximum wire diameter (mm)	
7	0,38	11	0,30	19	0,23	2,0
7	0,43	16	0,29	19	0,27	2,7
19	0,30	16	0,32	12	0,37	3,4
19	0,32	16	0,35	37	0,23	4,0
19	0,37	15	0,42	37	0,27	5,4
19	0,43			37	0,30	6,6
19	0,46	23	0,42	37	0,33	8,2
37	0,38	30	0,42	47	0,33	10,7
37	0,41	36	0,42	58	0,33	12,8
37	0,46	45	0,42	70	0,33	16,0
		59	0,42	98	0,33	21,1
		50	0,52	126	0,33	27,6
		60	0,52	154	0,33	33,2
		78	0,52	209	0,33	43,5
		95	0,52	247	0,33	52,7
		122	0,52	323	0,33	67,8
		141	0,52	361	0,33	77,8
121	0,62	172	0,52	456	0,33	95,4
134	0,62	193	0,52	494	0,33	106,5
172	0,62	247	0,52	646	0,33	136,8
201	0,62	289	0,52	741	0,33	159,7
180	0,72	351	0,52	855	0,33	194,3
213	0,72	420	0,52	1064	0,33	229,8
238	0,72	463	0,52	1178	0,33	256,8
234	0,82	305	0,72			329,8
243	0,92	398	0,72			429,8



# SEMI-FINISHED PRODUCTS

SOLID WIRES AND ISOLATED CONDUCTORS



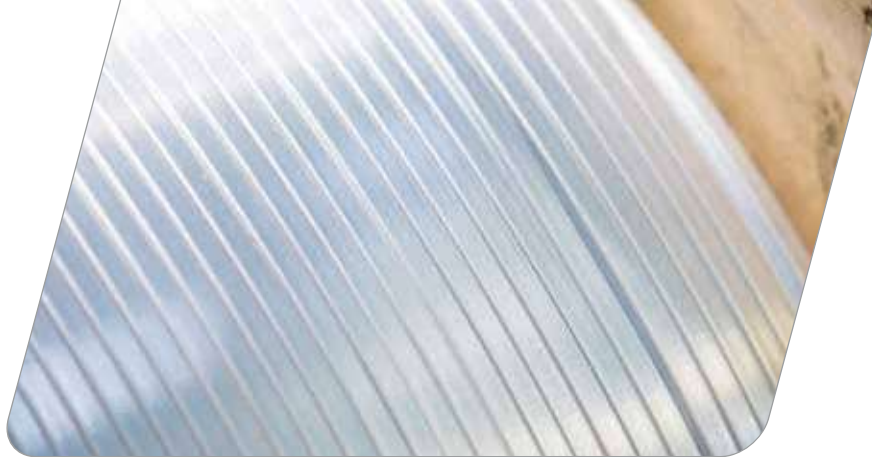

## FLAT, ROUND AND SECTORIAL WIRES

Norm	Based on customer technical specifications
Cross section	3-1.200 mm <sup>2</sup>
Width	5-75 mm
Max thickness	20 mm
Max diameter	50 mm
Max ratio	35:1
Packaging	DIN 2000 / 3.000 kg

## ISOLATED FLAT WIRES AND CABLES

Norm EN 60317-09

		Nominal Width (mm)														
		4	5	6	7	8	9	10	12	14	16	18	20	22	24	26
Nominal Thickness (mm)	1,2															
	2															
	3															
	4															
	5															
	6															
	7															
	8															
	10															
	12															
	14															

Shapes in spools (up to 1 Tm)



The image features a minimalist design on a white background. A large, irregular shape is formed by overlapping, rounded rectangular outlines in a dark brown color. This shape is positioned on the right side of the page. Within this shape, the text 'PARTS AND SUB-ASSEMBLIES' is centered. The text is in a bold, uppercase, sans-serif font. Behind the main shape, there are two areas filled with a fine, parallel hatched pattern in a light brown color. One hatched area is in the top right corner, and the other is in the bottom right corner, both partially overlapping the main shape's boundary.

# PARTS AND SUB-ASSEMBLIES

We are specialized in the manufacturing of small lots up to large series of parts and sub-assemblies (copper, aluminium and alloys) on customer's drawing, with the possibility to perform surface treatment using an electrolytic process (copper, tin, nickel, etc), thereby offering solutions that fully comply with our customers' production requirements.








The image features a minimalist design with a white background. On the right side, there are several overlapping, stepped rectangular shapes outlined in a light green color. These shapes are partially filled with a fine, parallel green hatched pattern. The text 'RECYCLABILITY AND CIRCULARITY' is centered within the largest, most prominent of these shapes.

# RECYCLABILITY AND CIRCULARITY

## TOLLING SERVICE - RECYCLED UNITS



0 Emissions Trucks

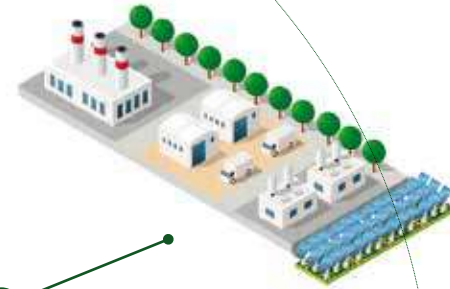

Solar energy self-consumption




Customer Scrap Raw Materials



Eco-packaging



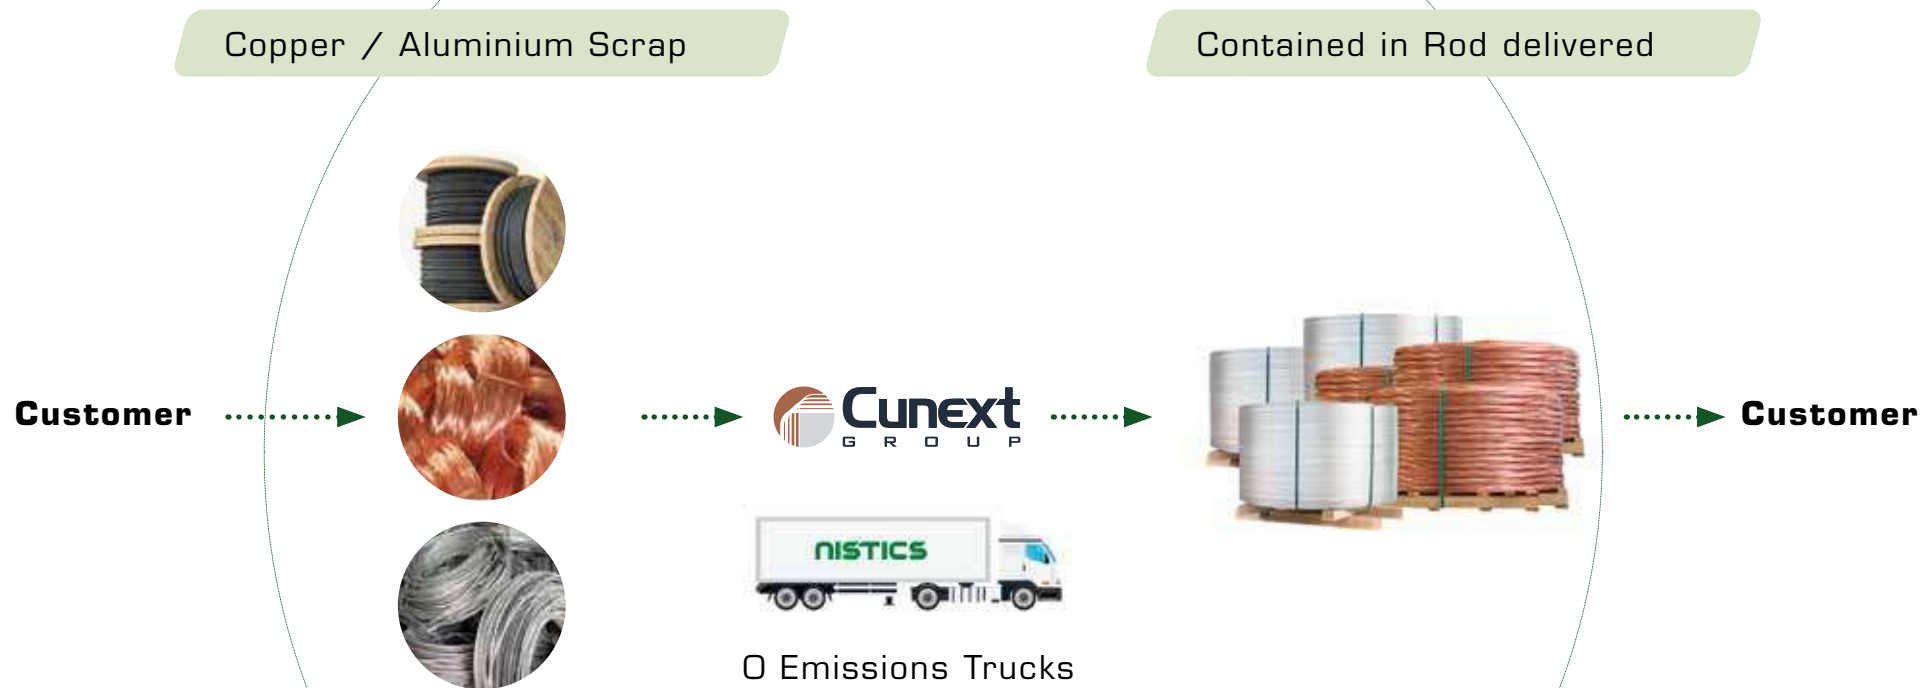



**CÓRDOBA**  
**Cunext Copper Industries**  
**Cablexsur**

**Transformados Cunext**  
 Avd. de la Fábrica s/n  
 14005 Córdoba  
 +34 957 499 300  
 +34 957 499 319

**Estacor**  
 Pl. EL Caño II, Calle C  
 14220 Espiel (Córdoba)  
 +34 957 363 357

**MADRIDSTANCOR**  
 Calle Nuñez de Balboa, nº 122  
 28006 Madrid  
 +34 913 193 730  
 +34 913 195 116

**BARCELONA**  
 Avda. Josep Tarradellas,  
 8-10, 2º 3º  
 08029 Barcelona  
 +34 938 445 130  
 +34 938 439 919


**VITORIA**  
**ECN**  
**Transformados Combisa**  
 Calle Portal de Vergara, 36  
 01013 Vitoria-Gasteiz  
 +34 674 323 893

**ZARAGOZA**  
**Ibermetalia**  
 Ctra. de Logroño, km 17  
 50629 Sobradiel (Zaragoza)

**TRAVARTEC**  
**Travar Tec SRL**  
 Via Bertoli 17A  
 25050 Rodengo Saiano (BS)  
 Td. +39 030 6810728  
 Fax +39 030 61130  
 info@travartec.com  
 www.travartec.com  
 ITALIA





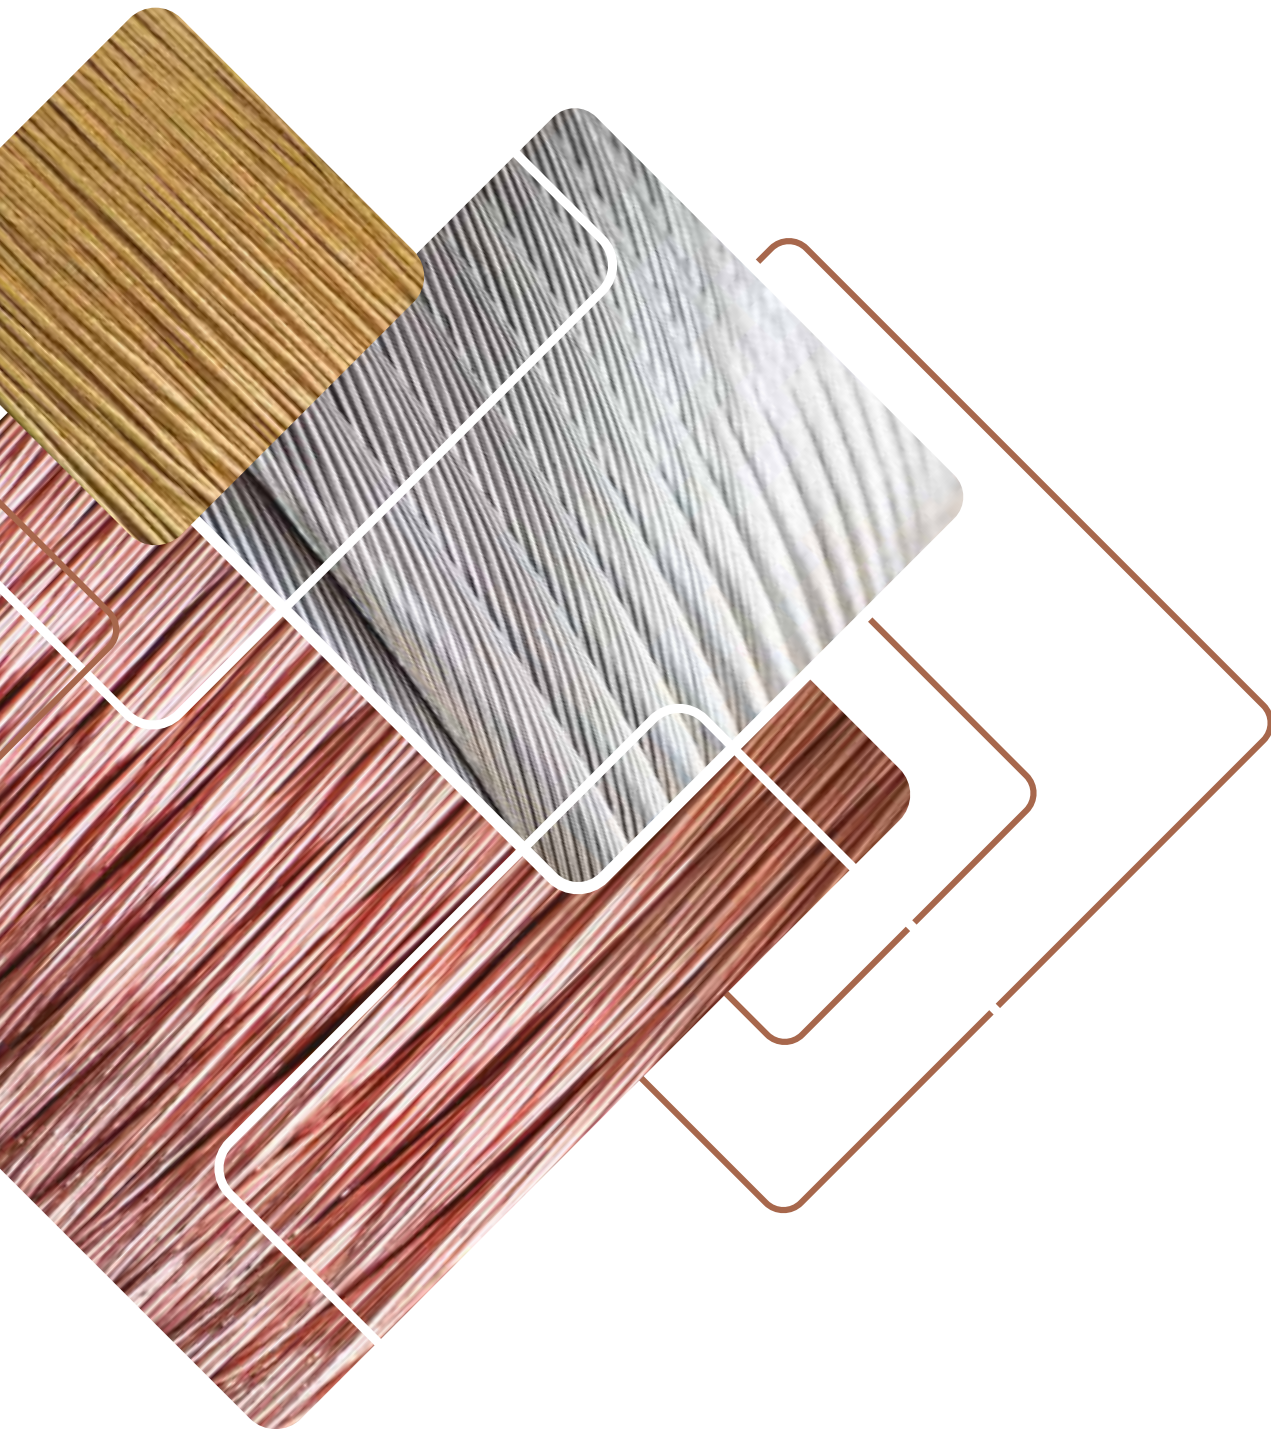

*Headquarters:*  
Avda. de la Fábrica, S/N  
14005 Córdoba · Spain  
(+34) 957 499 300  
**[www.cunext.com](http://www.cunext.com)**